next ight CORE









ONBOARD & EXT DIMMING



WET RATED IP65



PLUG AND



PASSIVELY COOLED














Package Contents

- 1 Fixture x1
- 2 Fixture Hooks x2
- 3 NextLight Pro Series Power Cord (10') x1 (see available Power Cord Voltage Options)
- 4 NextLight Pro Series Control Cable (10') x1





Power Cord Voltage Options










Product Dimensions

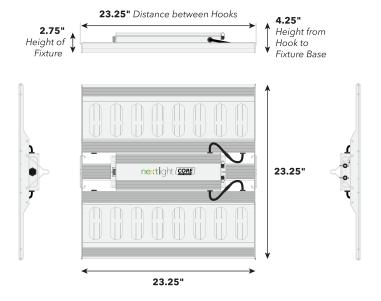

Technical Specifications

SPECIFICATION	NEXTLIGHT CORE PRO
Operating Voltage	120-277 VAC
Operating Frequency	50/60 Hz
Input Current	1.75A @ 120V, 0.88A @ 240V, 0.76A @ 277V
PPF	530
Energy Use	210 Watts (205W @ 277V)
PPF/Watt	2.6
Operating Temperature	-4°F to 104°F (-20°C to 40°C)
BTU Output	720
Dimensions (in)	23.25 x 23.25 x 2.75
Dimensions (mm)	586 x 585 x 68
Weight	11 lbs (4.9 kg)
Warranty	5 Year Limited
Life Rating	Q90 > 50,000 Hours
Certifications	DLC Hort, CE, UL 8800
Environment	IP65, Wet Rated

Onboard Dimmer

The Onboard Dimmer allows you to toggle Dim values of 0%, 25%, 50%, 75%, 100% and EXT for external use with *NextLight Control Pro* or *NextLight Adapt Pro*.



NextLight Full Spectrum LED

NextLight fixtures emit a full spectrum, bright white light which is more sun-like than even your traditional HPS. Using this spectrum you can expect tighter internodal spacing and better overall quality.

NextLight's Full Spectrum is easy to work under and provides the same sun-like qualities plants love without the negatives of high energy requirements and high heat.

